



LED Column Warning Light

Introduction:

1. Elegant structure, simple and beautiful, super high price performance.
2. With excellent heat dissipation, make sure the product lifetime.
3. High brightness LED chip, long lifetime and low decay.
4. Three kinds of base are available, easy to install.



Application: CNC machine, Automatic equipment, SMT equipment etc.

Warranty: 2 years

Certification: CE, RoHS, FCC


Ordering code:

DS	CL 50- 24 S D 0 RYG
	1 2 3 4 5 6 7
1. Type	CL (Column Light)
2. Diameter	50: 50 mm, 70: 70mm
3. Voltage	12: DC12V, 24: DC24V, A: AC100-240V(50/60Hz)
4. Function	0: Steady, A: Steady with buzzer, S: Red flash, C: Red flash with buzzer, D: All flash, E: All flash with buzzer
5. Connect type	C: contact type, D: PNP& NPN
6. Mounting type	B: Base, 0: Foldable Pole, L: L bracket
7. Color	R: Red, Y: Yellow, G: Green, B: Blue, W: White

Parameter:

Power	1.4W for each color
Input voltage	DC12V, DC24V, AC100-240V(50/60Hz)
Current	60-70mA for each color
Working Temperature	-20~45℃
IP rating	IP53, IP65(without buzzer)
Buzzer volume	>85dB
Material	PC lens and ABS body
Lifetime	50,000 hours
Installation	Fixed by screw or bracket

Installation:

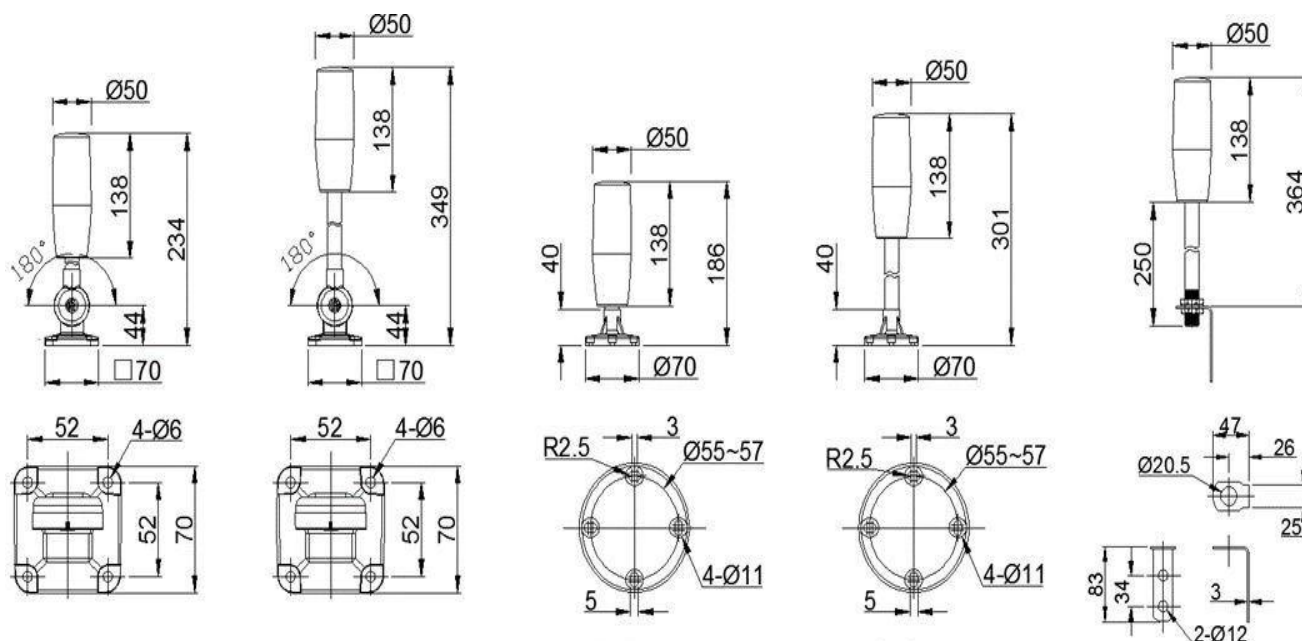

Environmental Requirements:


Working temperature :	-20~45°C
Save temperature :	-40~70°C
Working humidity:	10~90%
Save humidity:	10~90%

Technical parameter:


Column Light		Denki Seigyo Led Column Light			
Voltage	DC24V	current	20mA	Power	0.48W
	AC220V		5.5mA		
IP rating	IP50	Length of cable	45mm 65mm	Color of body	white gray
Light	Chip 3528 LED 0.06W/pcs		Life of whole light	50,000 hrs	
Beam angle	360°	color	Red、yellow、green	Buzzer	85 DB

Wiring instruction:

PNP & NPN

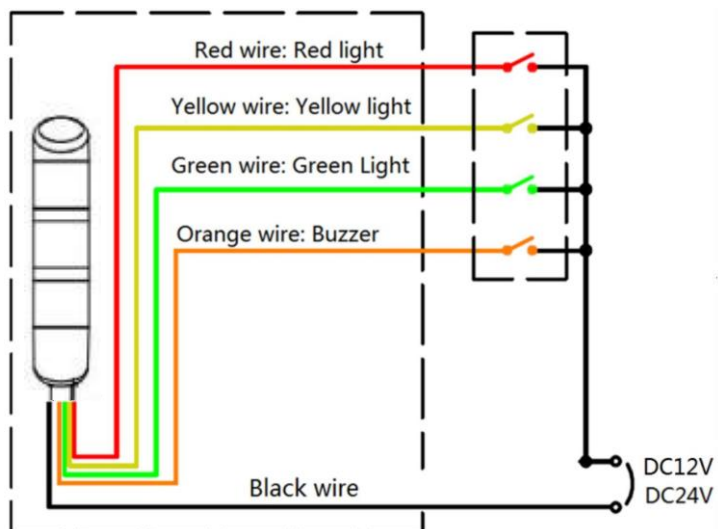

Contact type

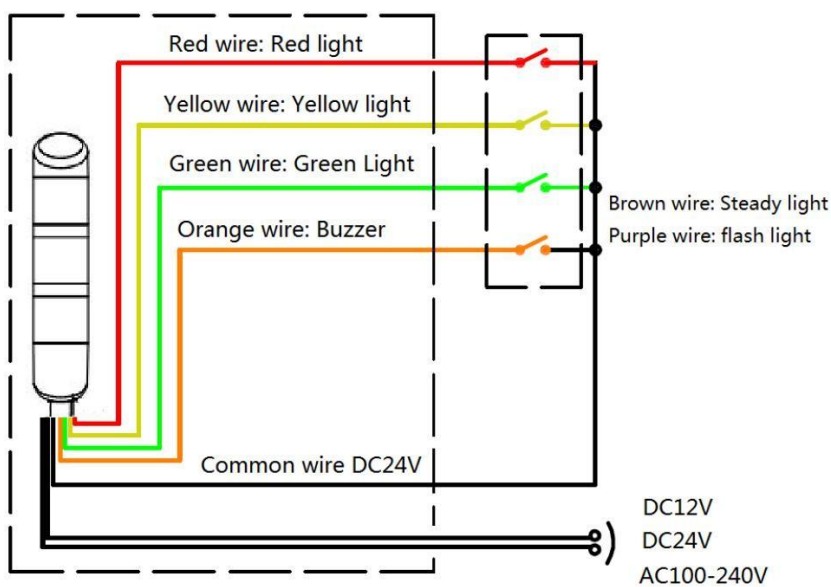

Probable Models-

DSCL50-24SD-RYG

DSCL50-24SD-RG

DSCL50-24SD-R

Denki Seigyo

Kirigaoka City : Midori-ku Yokohama-shi State/province/area: Kanagawa

Web: www.denkiseigyo.com