

## LED Strip Light DSL Series

### Introduction:

1. Dsl series is designed for machine lighting, workstation lighting, automation machinery.
2. IP65 waterproof, suitable for variety application.
3. Use PC housing and aluminum PCB, safe and durable.
4. Length can be customized according to your application.
5. High lumen SMD2835 LED chip, efficiency up to 75-85m/w, energy saving.
6. SUS304 stainless steel screw mounting clip, very easy to install.


### Application:

Machine Light, Robotic Assembly and Control Cabinet, Machine Vision Application.

**Warranty:** 2 years



### Dimension(mm)

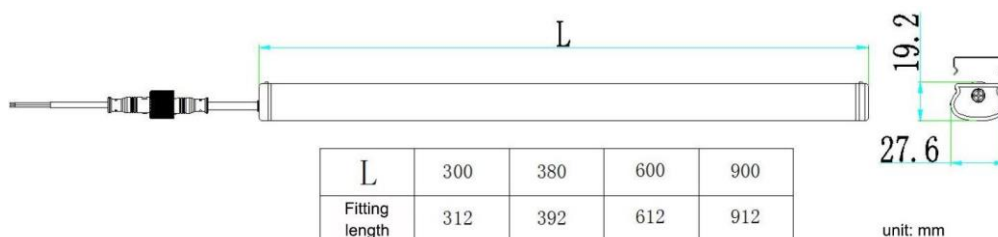


\*Standard length of input wire: 0.75m

### Ordering code:

| DSL-              | 360                                | - | 24 | D | - | SL | 0 |
|-------------------|------------------------------------|---|----|---|---|----|---|
|                   | 1                                  | 2 | 3  | 4 | 5 |    |   |
| 1. Length         | 300, 364, 392, 446, 600, 900, 1050 |   |    |   |   |    |   |
| 2. Voltage        | 24: DC24V, 12: DC12V, 220:220V     |   |    |   |   |    |   |
| 3.Function        | A: A.C, D: D.C                     |   |    |   |   |    |   |
| 4.Type            | SL: Strip Light                    |   |    |   |   |    |   |
| 5.Connection type | 0: Cable C: Connector              |   |    |   |   |    |   |

### Installation

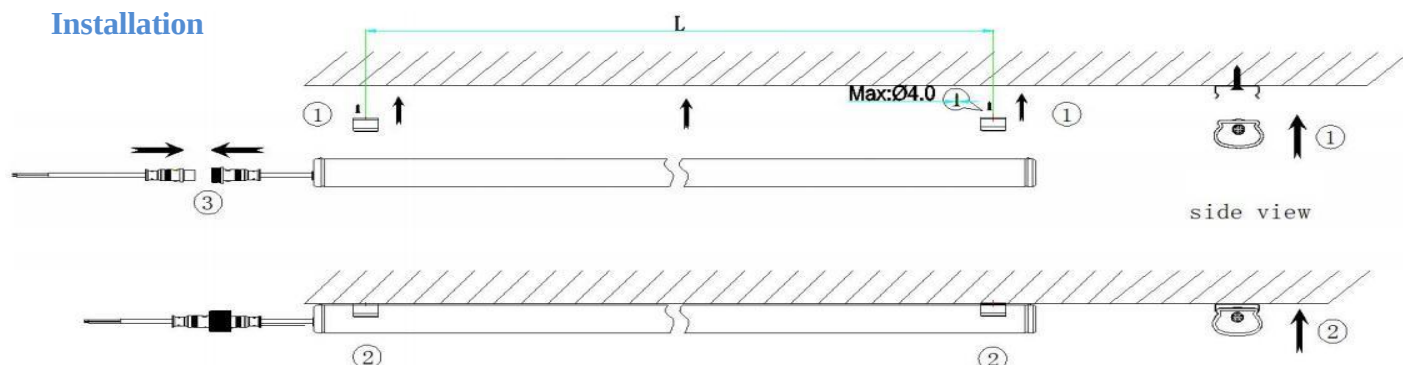



### Parameter:

|                               |                                      |
|-------------------------------|--------------------------------------|
| Model No.                     | DSL-364-24D-SL                       |
| Input voltage                 | 24VDC (Voltage range: 20-28V)        |
| IP rating                     | IP65                                 |
| Beam angle                    | 120 deg                              |
| Lumen efficiency              | 75-85lm/w                            |
| CRI                           | Ra>82                                |
| Material                      | Milky color PC housing               |
| Warranty                      | 2 years                              |
| Lifetime                      | 50,000 hours                         |
| Working temperature/ humidity | -20~35℃ / 10%-90%                    |
| Storage temperature/ humidity | -20~60℃ / 10%-90%                    |
| Installation                  | Stainless steel screw mounting clips |

### Information:

1. Install the clips with screws on the mounting surface, screw hole is Max. 4mm.
2. Press the lamp into the clips at the right position.
3. Check if the O-ring on the female connector, if yes, connect the female and male connector on lamp and lock tightly.
4. Power the lamp to check if work normally.

**Warning:** Please power off before mounting.